

Surface & Suspended


Easy-Release Diffuser

BESA Mounting Points

Conduit Side Entry


Metal Housing

Dimensions

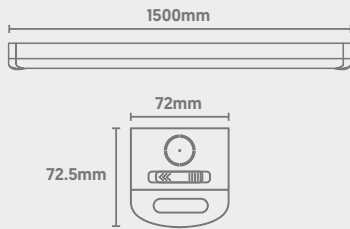

A
↑
G **E** Light Source Energy Rating

Photometric Data

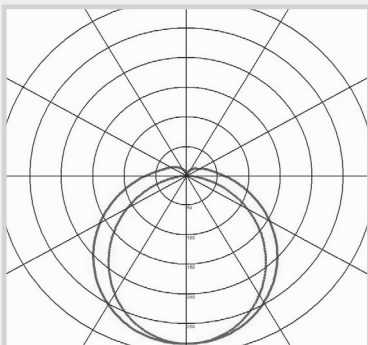


QPac

Linear Batten

CODE: QPAC-60-1500NW

QVIS[®]
LED LIGHTING

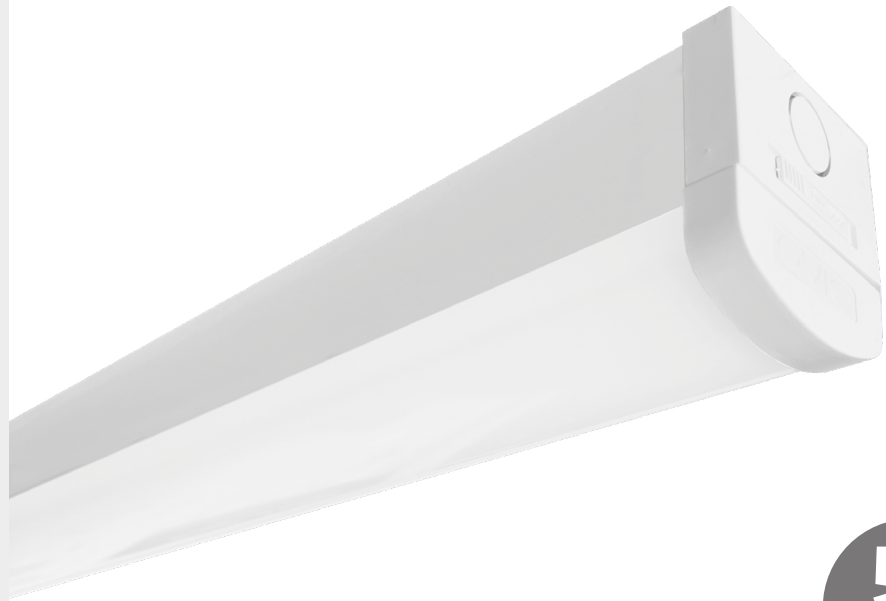

5 YEARS
WARRANTY
+ 1 YEAR ON SITE *

Power	Efficacy	Output	Kelvin
60W	120lm/cW	7200Lm	4000K

Technical

Input Voltage	AC 220-240V
Beam Spread	120°
Colour Rendering Index	>80
Power Factor	>0.9
Operating Temp.	-20 to +40°C
Materials	Metal & Polycarbonate
IP Rating	IP20
Dimmable	On Request
Dimensions	1500mm x 72.5mm x 72mm
Weight	2.08kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS