





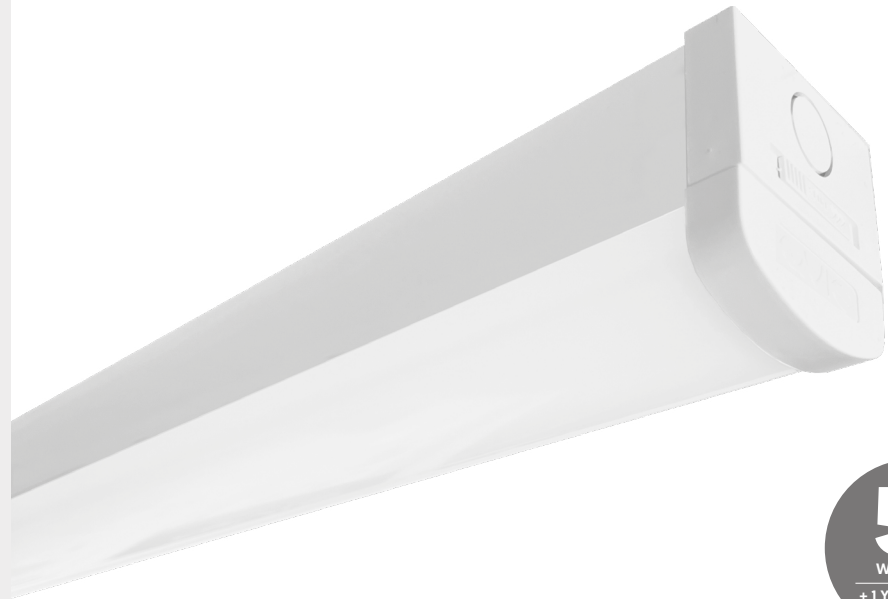
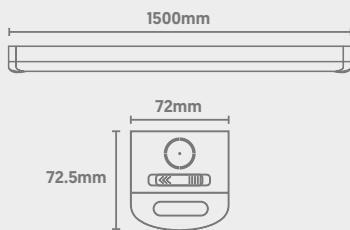
Surface & Suspended

QPac Linear Batten

CODE: QPAC-WS-1500TC

-  Easy-Release Diffuser
-  BESA Mounting Points
-  Conduit Side Entry
-  Metal Housing


Dimensions



| Power | Efficacy | Output | Kelvin |
|-------|----------|--------|--|
| 30W | 120Lm/cW | 3600Lm | Tri-Colour: 3000K, 4000K or 6000K |
| 60W | 120Lm/cW | 7200Lm | |



Photometric Data

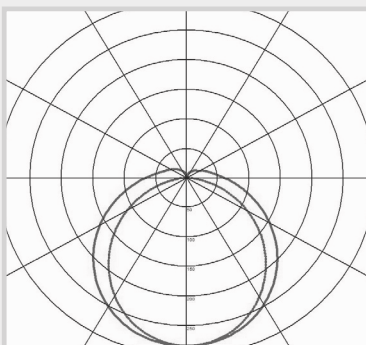

Technical

| | |
|------------------------|--|
| Input Voltage | AC 220-240V |
| Beam Spread | 120° |
| Colour Rendering Index | >80 |
| Power Factor | >0.9 |
| Operating Temp. | -20 to +40°C |
| Materials | Metal & Polycarbonate |
| IP Rating | IP20 |
| Dimmable | On Request |
| Dimensions | 1500mm x 72.5mm x 72mm |
| Weight | 2.08kg |
| MacAdam Step | <3 |
| Lifetime | 50,000 hours, L70-B10 (Ta 25 °C) |
| CE Standards | EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives | LVD, EMC, ERP & RoHS |