


Emergency


-  3 Hour Emergency
-  Overcharge Protection
-  Lithium Iron Phosphate Battery

Dimensions


Driver

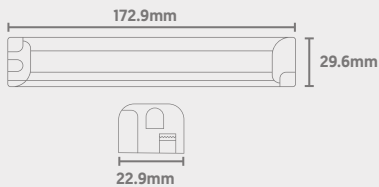

Downlight Head

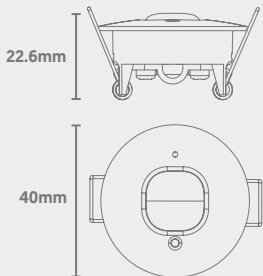

Photometric Data

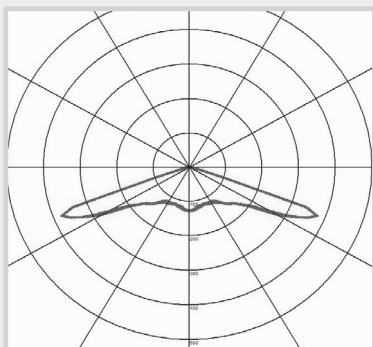

QPin

Mini Recessed Downlight

QVIS[®]
LIGHTING & SECURITY

CODE: QPIN-3H-OL



60mm bezels available
[Allows a cut out of up to 55mm]
(CODE: QPIN-BEZEL-60MM)



| Power | Output | Lens Type | Duration |
|-------|--------|-----------|----------|
| 1W | 130Lm | Open | 3 Hours |

Technical

| | |
|------------------------------------|---|
| Input Voltage | AC 220-240V |
| Emergency Type | Non-Maintained |
| IP Rating | IP20 |
| Operating Temp. | 0 to +45°C |
| Mains Current | 15mA |
| Mains Voltage Changeover Threshold | AC 140-180V |
| Protection | Overcharge & Discharge |
| Colour Temperature | 6500K |
| Battery Type | 3.2V LiFePO4; 1500mAh |
| Charge Time | 24 Hours |
| Cut Out | 34mm |
| Dimensions | Driver: 172.9mm x 29.6mm x 22.9mm Downlight Head: 40mm x 22.6mm |
| Weight | 0.145kg |
| MacAdam Step | <3 |
| CE Standards | EN60598-1, EN 60598 2-22, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives | LVD, EMC, ERP & RoHS |