


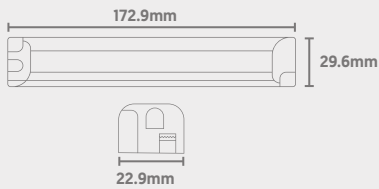


Emergency


-  3 Hour Emergency
-  Overcharge Protection
-  Lithium Iron Phosphate Battery

Dimensions


Driver



Downlight Head

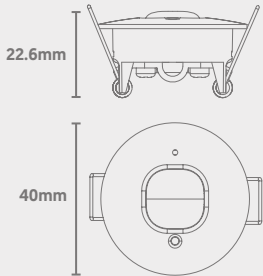

Photometric Data

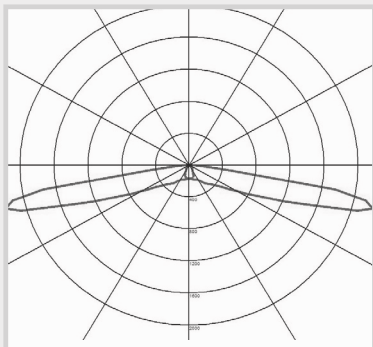

QPin

Mini Recessed Downlight

CODE: QPIN-3H-CL

QVIS[®]
LIGHTING & SECURITY



60mm bezels available
[Allows a cut out of up to 55mm]
(CODE: QPIN-BEZEL-60MM)



Power	Output	Lens Type	Duration
1W	130Lm	Corridor	3 Hours

Technical

Input Voltage	AC 220-240V
Emergency Type	Non-Maintained
IP Rating	IP20
Operating Temp.	0 to +45°C
Mains Current	15mA
Mains Voltage Changeover Threshold	AC 140-180V
Protection	Overcharge & Discharge
Colour Temperature	6500K
Battery Type	3.2V LiFePO4; 1500mAh
Charge Time	24 Hours
Cut Out	34mm
Dimensions	Driver: 172.9mm x 29.6mm x 22.9mm Downlight Head: 40mm x 22.6mm
Weight	0.145kg
MacAdam Step	<3
CE Standards	EN60598-1, EN 60598 2-22, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS