

Modular



Day & Night Operation
(Daylight Sensor)



8m Detection Distance




360° Detection Range



Up to 4m Install Height
(2.2m to 4m is recommended for optimal performance)

Dimensions

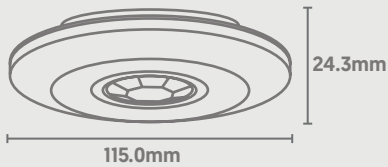

QPIR Gen 2

Surface Infrared Sensor

QVIS[®]
LIGHTING & SECURITY

CODE: QPIR-SUR-BLK



Main Specifications

Daylight Sensor	<3Lx to 2000Lx (Adjustable)
Hold Time	Min: 10s±3s; Max: 15min±2min
Detection Range	360°
Detection Distance	Up to 8m [24°C]
Detection Moving Speed	0.6-1.5m/s

Technical

Power Source	AC 220-240V
Power Frequency	50/60 Hz
Rated Load	1000W (LED)
Power Consumption	Approximately 0.5W
Operating Temperature	-20 to +40°C
Installation Height	2.2m to 4m
Material	Polycarbonate
IP Rating	IP65

Modular



Day & Night Operation
(Daylight Sensor)



8m Detection Distance



360° Detection Range



Up to 4m Install Height
(2.2m to 4m is recommended for optimal performance)


Dimensions

PIR Gen 2

Infrared Motion Sensor

CODE: QPIR2-REC-IP65

Detection Diagram

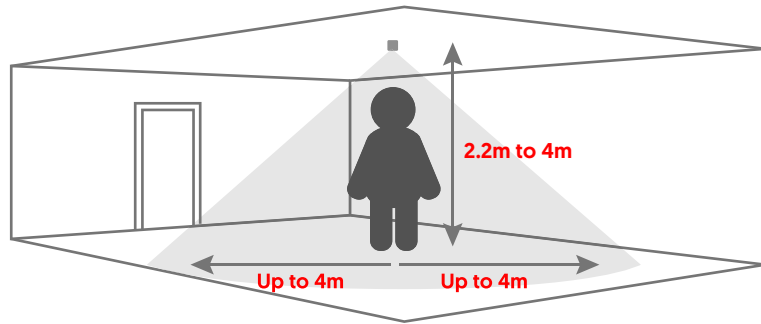

Wiring Diagram

