

External



IP65 Ingress Protection



Conduit Side & Back Entry




Wattage Switchable




Tri-Colour (3000K/4000K/6000K)

Dimensions

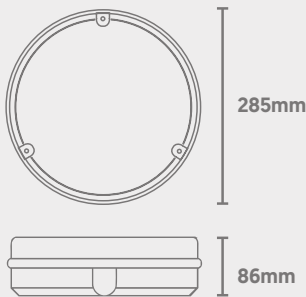

Light Source Energy Rating

Photometric Data

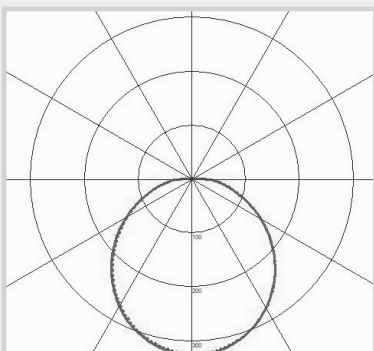

Rebel

Canopy Bulkhead

CODE: RBL-RWS-285TC/EM

QVIS[®]

LIGHTING & SECURITY



Power (Selectable)	Efficacy	Output	Kelvin
8W [Emergency 3W]	105Lm/cW	840Lm [Emergency 315Lm]	Tri-Colour: 3000K, 4000K or 6000K
12W [Emergency 3W]	105Lm/cW	1260Lm [Emergency 315Lm]	
15W [Emergency 3W]	105Lm/cW	1575Lm [Emergency 315Lm]	
18W [Emergency 3W]	105Lm/cW	1890Lm [Emergency 315Lm]	

Technical

Input Voltage	AC 220-240V
Colour Rendering Index	>80
Power Factor	>0.9
Operating Temp.	-20 to +40°C
Materials	Polycarbonate
IP Rating	IP65
IK Rating	IK10
Dimmable	On Request
Dimensions	285mm x 86mm
Weight	0.95kg
MacAdam Step	<3
Emergency Output	3 Hours [3W]
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS