

Continuous Linear



Direct/Indirect Output



Wattage Switchable




1-10V Dimmable (as Standard)




Tri-Colour (3000K/4000K/5000K)

Dimensions

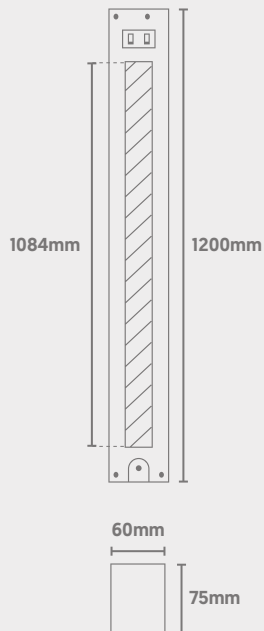

A **E** Light Source Energy Rating

Photometric Data

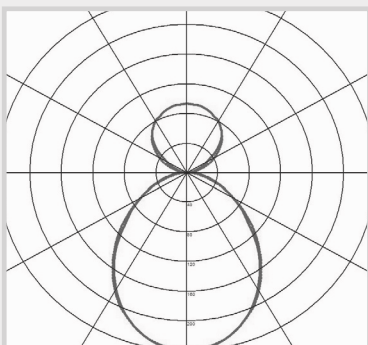


SpecLine

Direct/Indirect Linear

QVIS[®]
LIGHTING & SECURITY

CODE: SPECLINE-WS-1200TC/ID

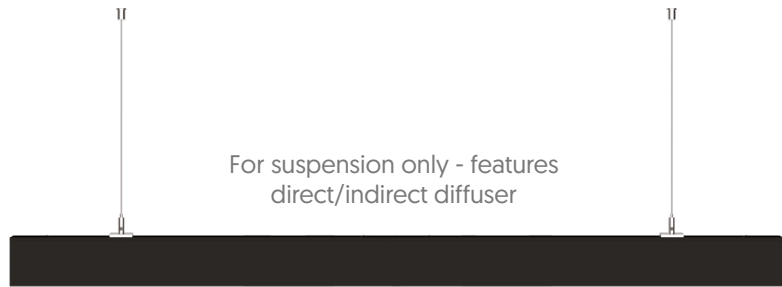

5 YEARS WARRANTY
+ 1 YEAR ON SITE*

Power (Selectable)	Efficacy	Output Split ↓ ↑	Kelvin
24W	120Lm/cW	864Lm ↑	Tri-Colour: 3000K, 4000K or 5000K
		2016Lm ↓	
32W	120Lm/cW	1152Lm ↑	
		2688Lm ↓	
40W	120Lm/cW	1440Lm ↑	
		3360Lm ↓	

Technical

Input Voltage	AC 200-240V
Colour Rendering Index	>80
Beam Spread	110°
Diffuser Type	Microprismatic
Operating Temp.	-20 to +45°C
Materials	Aluminium & Polycarbonate
IP Rating	IP20
Dimmable	1-10V (as Standard)
Dimensions	1200mm x 75mm x 60mm
Weight	2.53kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS