
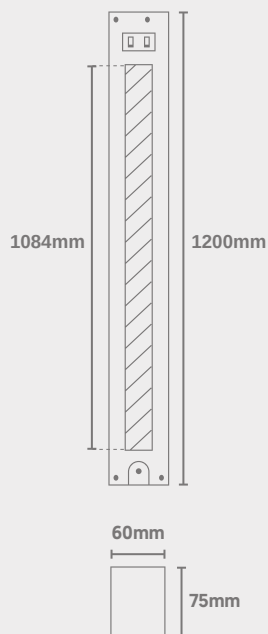


Continuous Linear


-  Direct/Indirect Output
-  Wattage Switchable
-  1-10V Dimmable (as Standard)
-  Tri-Colour (3000K/4000K/5000K)

Dimensions



A **E** Light Source Energy Rating

Photometric Data

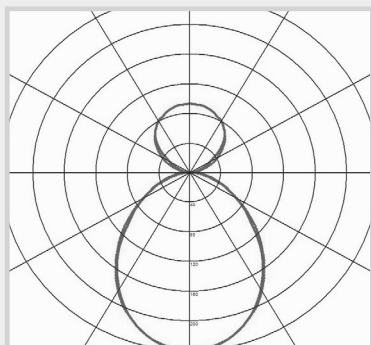


SpecLine

Direct/Indirect Linear



CODE: SPECLINE-WS-1200TC/ID/WH/EM

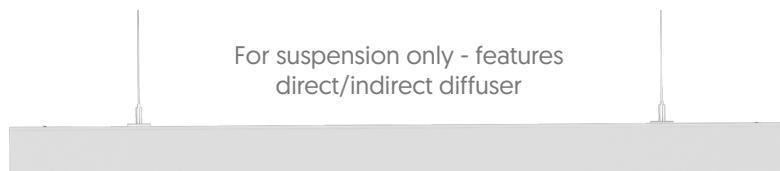

3HR
EMERGENCY
DURATION

5
YEARS
WARRANTY
+ 1 YEAR ON SITE*

Power [Selectable]	Efficacy	Output Split ↓ ↑	Kelvin
24W [Emergency 3W]	120Lm/cW	864Lm ↑ [Emergency 360Lm]	Tri-Colour: 3000K, 4000K or 5000K
		2016m ↓ [Emergency 360Lm]	
32W [Emergency 3W]	120Lm/cW	1152Lm ↑ [Emergency 360Lm]	
		2688Lm ↓ [Emergency 360Lm]	
40W [Emergency 3W]	120Lm/cW	1440Lm ↑ [Emergency 360Lm]	
		3360Lm ↓ [Emergency 360Lm]	

Technical

Input Voltage	AC 200-240V
Colour Rendering Index	>80
Beam Spread	110°
Diffuser Type	Microprismatic
Operating Temp.	-20 to +45°C
Materials	Aluminium & Polycarbonate
IP Rating	IP20
Dimmable	1-10V (as Standard)
Dimensions	1500mm x 75mm x 60mm
Weight	2.53kg
MacAdam Step	<3
Emergency Output	3 Hours [3W]
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS