

Surface & Suspended



Direct/Indirect Output



Low Glare Diffuser



Aesthetically Pleasing Design



Triac Dimmable (as Standard)

Dimensions




A
T
G

F

Light Source
Energy Rating


Photometric Data

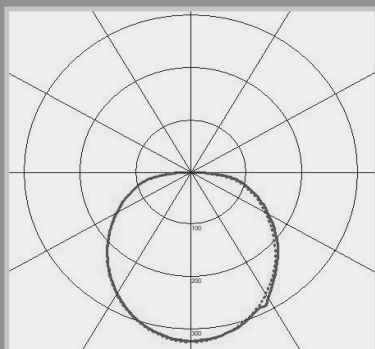

Polo Ring Pendant

CODE: POLO-35-400BNW/SUR/MD

DECORATIVE RANGE

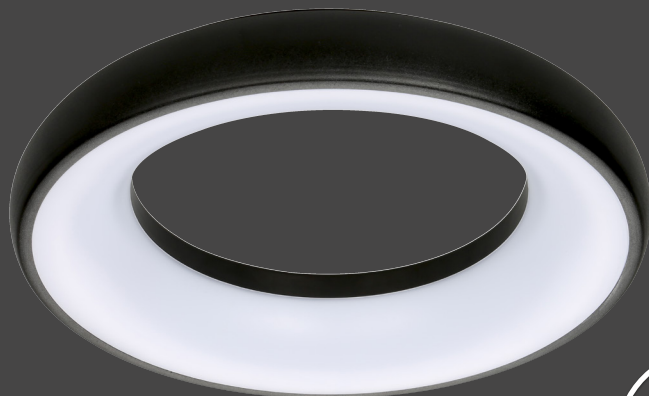

Power	Efficacy	Output	Kelvin
35W	94lm/cW	3290Lm	4000K

Technical

Input Voltage	AC 200-240V
Beam Spread	120°
Colour Rendering Index	>80
Power Factor	>0.9
Operating Temp.	-20 to +45°C
Materials	Aluminium & Polycarbonate
IP Rating	IP40
Dimmable	Triac Dimming
Dimensions	400mm x 68mm
Weight (Luminaire Only)	1.55kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS