

# Modular

# Ambience

## Direct/Indirect Panel

CODE: AMB-MP-30-15X3NW


-  Direct/Indirect Output
-  Low Glare MPS Diffuser
-  3m Inverted Y Suspension
-  Aluminium Housing



2 or 3 point adjustable suspension included (3m)



### Dimensions

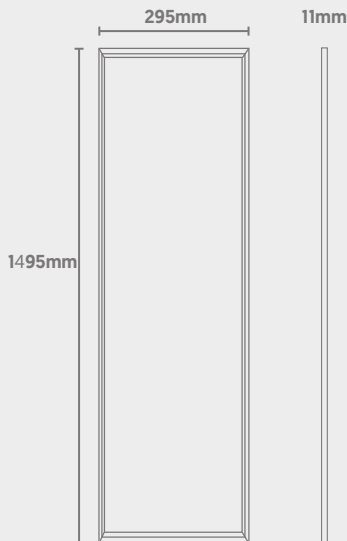

Power	Efficacy	Output	Kelvin
30W	125Lm/cW	750Lm ↑ 3000Lm ↓	4000K

### Technical

Input Voltage	AC 200-240V
Colour Rendering Index	>80
Beam Spread	120°
Diffuser Type	Microprismatic
Power Factor	>0.9
Typical UGR	<19
Operating Temp.	-20 to +50°C
Materials	Aluminium
IP Rating	IP40
Dimmable	On Request
Dimensions	1495mm x 295mm x 11mm
Weight	3.5kg
MacAdam Step	<3
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

**A** **E** Light Source Energy Rating

### Photometric Data

