

Baylite Pro


Low Bay

CODE: BP-WS-4K



- IP65 Ingress Protection
- IK10 Impact Resistance
- Wattage Switchable
- 1-10V Dimmable (as Standard)

Dimensions

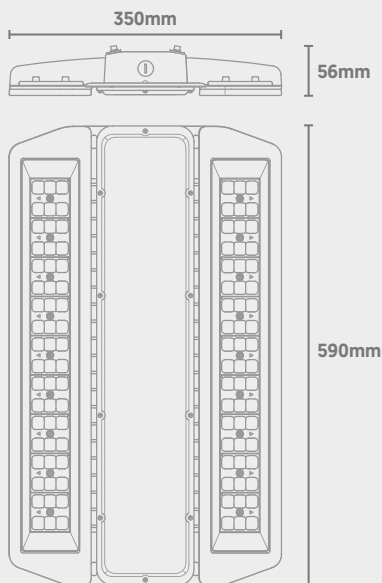

Wattage switchable from 0 to 200W via dial on back of fitting.

| Power (Selectable) | Efficacy | Output | Kelvin |
|--------------------|----------|---------|--------|
| 50W | 140Lm/cW | 7000Lm | 4000K |
| 75W | 140Lm/cW | 10500Lm | |
| 100W | 140Lm/cW | 14000Lm | |
| 125W | 140Lm/cW | 17500Lm | |
| 150W | 140Lm/cW | 21000Lm | |
| 175W | 140Lm/cW | 24500Lm | |
| 200W | 140Lm/cW | 28000Lm | |

Technical

| | |
|------------------------|--|
| Input Voltage | AC 100-240V |
| Colour Rendering Index | >80 |
| Beam Angle | 90° |
| Power Factor | 0.97 |
| Operating Temp. | -20 to +45°C |
| Materials | Aluminium & Tempered Glass |
| IP Rating | IP65 |
| IK Rating | IK10 |
| Dimmable | 1-10V (as Standard) |
| Dimensions | 590mm x 350mm x 56mm |
| Weight | 7.5kg |
| MacAdam Step | <3 |
| Lifetime | 50,000 hours, L90-B10 (Ta 25 °C) |
| CE Standards | EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives | LVD, EMC, ERP & RoHS |

Photometric Data

