

Taurus Tri-Colour Bulkhead


Surface & Suspended Range

CODE: TAU-16-325TC/TD

QVIS[®]
LED LIGHTING



TECHNICAL DRAWINGS

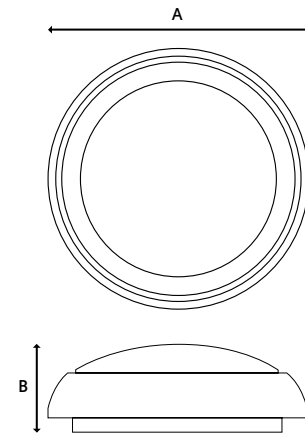


A = 325mm B = 109mm

Specification	Taurus
System Power	16W
Driver Manufacturer	Tridonic
LED Chipset	Epistar
Colour Rendering Index	>80
Lumen Output	1680Lm
LED Efficacy	105 Lm/cW
Power Factor	>0.9
Dimmable	DALI / Switch-Dim / Corridor / DSI
IP Rating	IP65
IK Rating	IK10
Colour Temperature	3000K / 4000K / 6000K
Housing Material	Polycarbonate
Diffuser Material	Polycarbonate
Operating Temperature	-20 to +40 °C
Input Voltage	AC220-240V
Dimensions	325mm x 109mm
Weight	0.89kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION

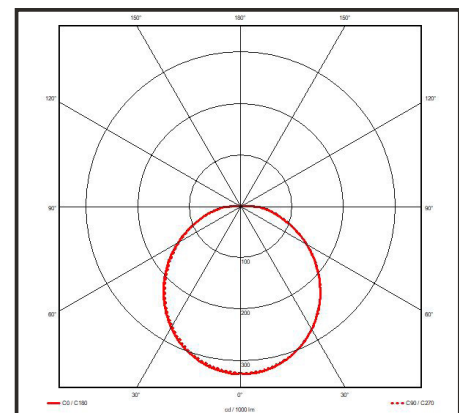

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com