

# Glow UFO High Bay



## Industrial Range

CODE: GLOWUFO-200CW

**QVIS**<sup>®</sup>  
LED LIGHTING




### TECHNICAL DRAWINGS



A = 150mm    C = 260mm  
B = 165mm

| Specification          | Glow UFO   |
|------------------------|--|
| System Power           | 200W   |
| Driver Manufacturer    | Lifud  |
| LED Chipset            | Samsung  |
| Colour Rendering Index | >85  |
| Lumen Output           | 28000Lm  |
| LED Efficacy           | 140 Lm/cW  |
| Power Factor           | >0.9   |
| Dimmable               | 1-10V  |
| IP Rating              | IP65   |
| IK Rating              | IK08   |
| Colour Temperature     | 6000K  |
| Beam Spread            | 120°   |
| Housing Material       | Aluminium  |
| Diffuser Material      | Tempered Glass   |
| Operating Temperature  | -20 to +50°C   |
| Input Voltage          | AC200-240V, 47-63Hz  |
| Dimensions             | 260mm x 165mm  |
| Weight                 | 4.8kg  |
| MacAdam Step           | <3   |
| Lifetime               | 50,000 hours, L70-B10 [Ta 25 °C]   |
| CE Standards           | EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives          | LVD, EMC, ERP & RoHS   |

### LUMINOUS INTENSITY DISTRIBUTION

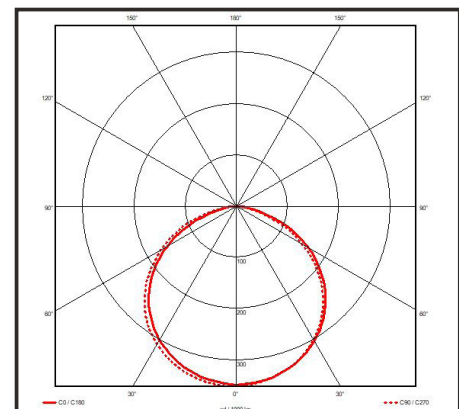

\* Warranty terms and conditions apply

**Information is subject to change and can be withdrawn without notice**

For further information on our products or terms and conditions visit our website [www.qvis.co.uk/lighting](http://www.qvis.co.uk/lighting) or email: [sales@qvislighting.com](mailto:sales@qvislighting.com)