

Clarus Conventional Downlight (172mm)

Downlight Range


CODE: CL172-18-FR

QVIS[®]
LED LIGHTING



*

TECHNICAL DRAWINGS

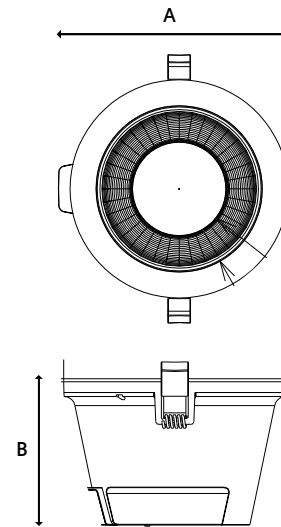


A = 172mm B = 95mm

Specification	Clarus
System Power	18W
Driver Manufacturer	Tridonic
LED Chipset	Samsung
Colour Rendering Index	>80
Typical UGR	<19
Lumen Output	1890Lm
LED Efficacy	105 Lm/cW
Power Factor	>0.9
IP Rating	IP54
IK Rating	IK08
Dimmable	On Request
Beam Spread	60°
Colour Temperature	3000K / 4000K / 5700K
Housing Material	Aluminium & Polycarbonate
Reflector Type	Aluminium Faceted
Operating Temperature	-20 to +45 °C
Input Voltage	AC90-305V
Cut Out Diameter	160mm
Dimensions	172mm x 95mm
Weight	0.45kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION

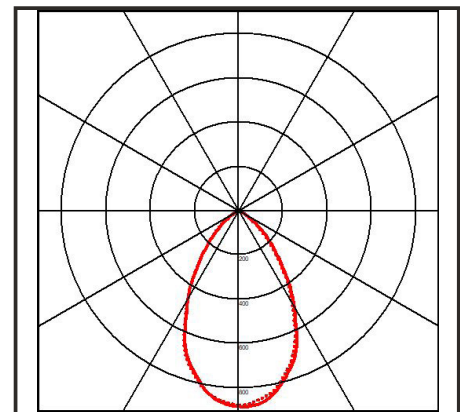

Information is subject to change and can be withdrawn without notice

For further information on our products or terms and conditions visit our website www.qvis.co.uk/lighting or email: sales@qvislighting.com