


LYNX RECESSED MODULAR (12x3)

LYNX-SLG30-12X3WW/TE



LIGHTING & SECURITY

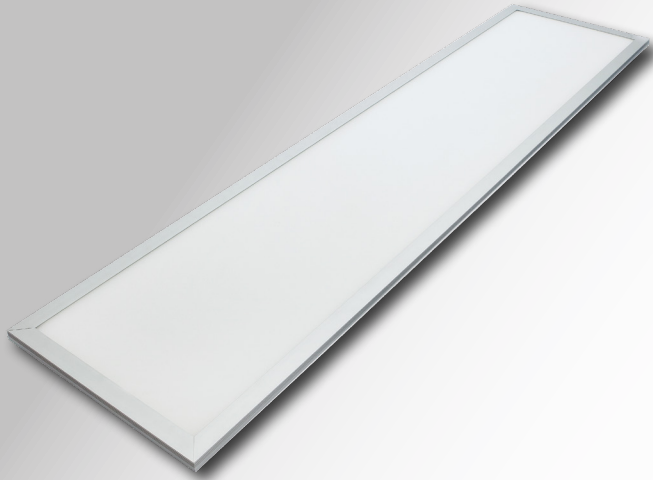

3HR EMERGENCY 3W BATTERY	IP44	30W POWER	5YR WARRANTY 1YR ON-SITE
TP(a)	MPS DIFFUSER	3600 LUMENS	




Driver Manufacturer




LED's inside

TECHNICAL DRAWINGS

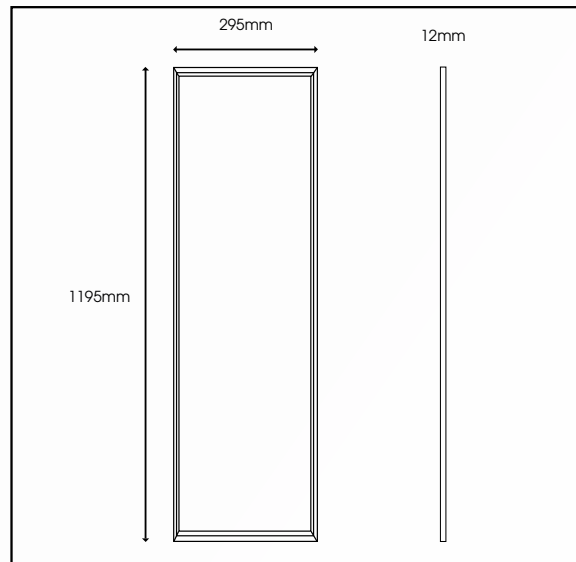

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

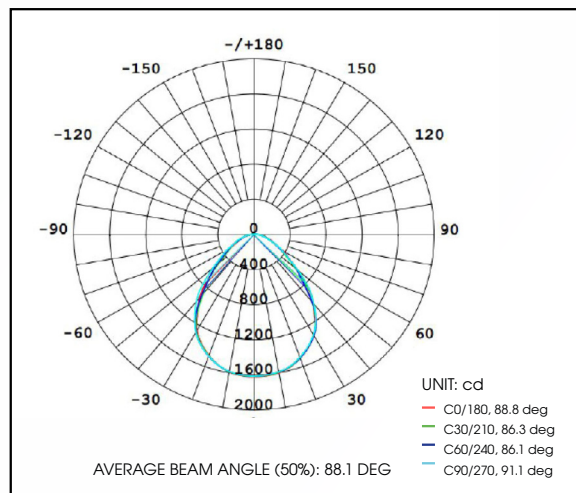

Specification	Lynx SLG 12x3
System Power	30W (Emergency 3W)
Driver Manufacturer	Tridonic
LED Chipset	Samsung
Diffuser	Microprism
Colour Rendering Index	>85
Typical UGR	<17
LED Efficacy	120 Lm/cW
Lumen Output	3600Lm (Emergency 360Lm)
Fire Rating	TP(a)
Dimmable	Dall / Switch-Dim / Corridor / DSI
Power Factor	0.95
IP Rating	IP44
Beam Spread	160 °
Colour Type	Single
Colour Temperature	3000K
Housing Material	High Grade 6063 Aluminium
Light Guide Plate	PMMA
Operating Temperature	-20 to 50 °C
Input Voltage	AC 200-240V, 47-63Hz
Weight	2.8kg
Dimensions	1195mm x 295mm x 12mm
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
Emergency Output	3 Hours (3W)*
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

*For emergency products with a rated service life of < 50,000 operating hours, QVIS offers a 5-year warranty period on the luminaire and 1-year warranty period on the battery pack



SWITCH DIM



10% CORRIDOR



DSI

For further information on our products or terms and conditions visit our website www.qvisled.com or email: sales@qvislighting.com

MODULAR & RECESSED RANGE