





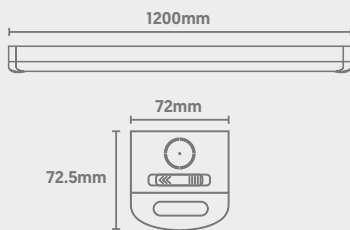
Surface & Suspended

QPac Linear Batten

CODE: QPAC-20-1200NW

-  Easy-Release Diffuser
-  BESA Mounting Points
-  Conduit Side Entry
-  Metal Housing

Dimensions



| Power | Efficacy | Output | Kelvin |
|-------|----------|--------|--------|
| 20W | 120lm/cW | 2400Lm | 4000K |

Technical

| | |
|------------------------|--|
| Input Voltage | AC 220-240V |
| Beam Spread | 120° |
| Colour Rendering Index | >80 |
| Power Factor | >0.9 |
| Operating Temp. | -20 to +40°C |
| Materials | Metal & Polycarbonate |
| IP Rating | IP20 |
| Dimmable | On Request |
| Dimensions | 1200mm x 72.5mm x 72mm |
| Weight | 1.59kg |
| MacAdam Step | <3 |
| Lifetime | 50,000 hours, L70-B10 (Ta 25 °C) |
| CE Standards | EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives | LVD, EMC, ERP & RoHS |

A
↑
G **E** Light Source Energy Rating

Photometric Data

