

# QPac Linear Batten (1500mm)

Surface & Suspended Range

CODE: QPAC-60-1500TC/EM




**QUICK RELEASE -  
EASILY REMOVE  
THE DIFFUSER  
FROM THE BASE**




Specification	QPac
System Power	60W [Emergency 3W]
Driver Manufacturer	Q-Drive
LED Chipset	Epistar
Colour Rendering Index	>80
Lumen Output	7200Lm [Emergency 360Lm]
LED Efficacy	120 Lm/cW
Power Factor	>0.9
Dimmable	On Request
IP Rating	IP20
Colour Temperature	3000K/4000K/6000K
Beam Spread	120°
Housing Material	Iron
Diffuser Material	Polycarbonate
Operating Temperature	-20 to +40°C
Input Voltage	220-240V
Dimensions	1500mm x 72mm x 72.5mm
Weight	2.33kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
Emergency Output	3 Hours [3W]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

## TECHNICAL DRAWINGS

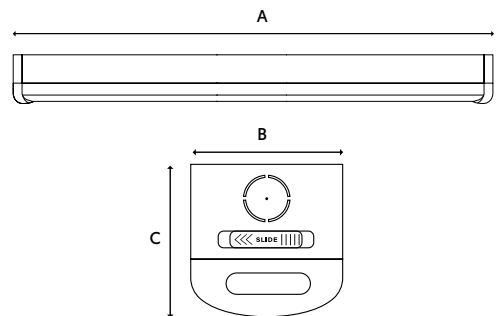

A = 1500mm C = 72.5mm  
B = 72mm

## LUMINOUS INTENSITY DISTRIBUTION

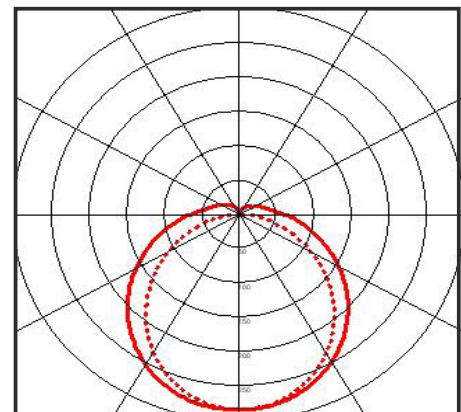

\* Warranty terms and conditions apply

**Information is subject to change and can be withdrawn without notice**

For further information on our products or terms and conditions visit our website [www.qvis.co.uk/lighting](http://www.qvis.co.uk/lighting) or email: [sales@qvislighting.com](mailto:sales@qvislighting.com)