

# External




IP66 Ingress Protection



Aluminium Housing




1m Cable Flex




Tri-Colour (3000K/4000K/6000K)

### Dimensions

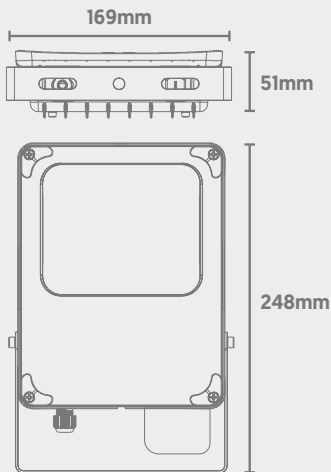

Light Source Energy Rating

### Photometric Data

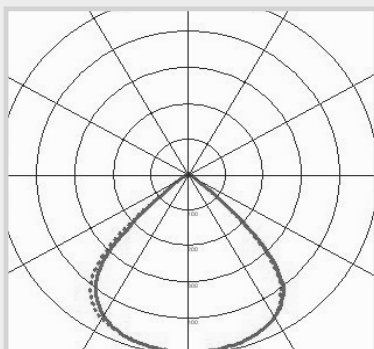

# QFlood Residential Tri-Colour Flood Light



CODE: QFLOOD-30TC/D



Tri-Colour Switchable Behind Access Cap



Power	Efficacy	Output	Kelvin
30W	145Lm/cW	4350Lm	Tri-Colour: 3000K, 4000K or 6000K

### Technical

Input Voltage	AC 100-277V
Colour Rendering Index	>80
Beam Spread	120°
Power Factor	>0.93
Operating Temp.	-20 to +45°C
Materials	Aluminium
IP Rating	IP66
Dimmable	DALI 2.0
Cable Flex	1m
Dimensions	248mm x 169mm x 51mm
Weight	1.2kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS