

## Surface & Suspended



**High Ball-Impact Resistance**  
(DIN 18032-3)



**Flicker-Free**




**High LED Efficacy**




**IK10 Impact Resistance**

### Dimensions

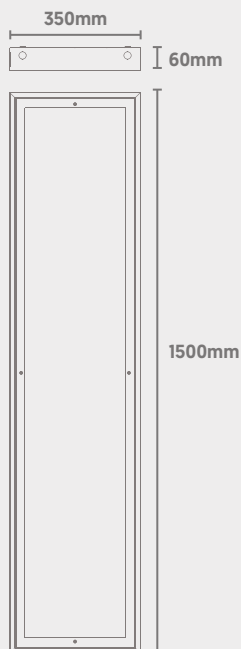

**D** Light Source Energy Rating

### Photometric Data

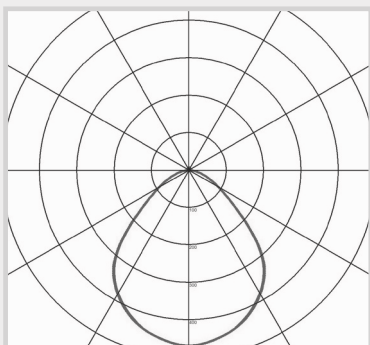

# SportPro

## Linear

**QVIS**<sup>®</sup>  
LED LIGHTING

CODE: SPL-150-1500NW/EM



Power	Efficacy	Output	Kelvin
150W [Emergency 5W]	140Lm/cW	21000Lm [Emergency 700Lm]	4000K

### Technical

Input Voltage	AC 220-240V
Colour Rendering Index	>80
Beam Spread	80°
Power Factor	>0.9
Operating Temp.	-20 to +40°C
Materials	Metal & Polycarbonate
Ball-Impact Resistance	DIN 18032-3
IK Rating	IK10
Dimmable	On Request
Dimensions	1500mm x 350mm x 60mm
Weight	10.63kg
MacAdam Step	<3
Emergency Output	3 Hours [5W]
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS