

Surface & Suspended



IP65 Ingress Protection



IK10 Impact Resistance



Hinged Gear Tray




Tri-Colour (3000K/4000K/6000K)

Dimensions



78mm




320mm



Light Source Energy Rating

Photometric Data

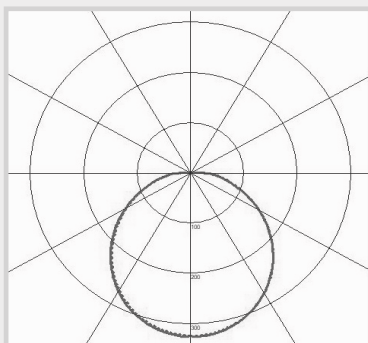

Taurus Slim Gen 2

Tri-Colour Bulkhead

QVIS[®]
LED LIGHTING

CODE: TAU-S2-WS-320TC/EM



Power (Selectable)	Efficacy	Output	Kelvin
12W [Emergency 3W]	100Lm/cW	1200Lm [Emergency 300Lm]	Tri-Colour: 3000K, 4000K or 6000K
15W [Emergency 3W]	100Lm/cW	1500Lm [Emergency 300Lm]	
18W [Emergency 3W]	100Lm/cW	1800Lm [Emergency 300Lm]	
22W [Emergency 3W]	100Lm/cW	2200Lm [Emergency 300Lm]	

Technical

Input Voltage	AC 220-240V
Beam Spread	120°
Colour Rendering Index	>80
Power Factor	>0.8
Operating Temp.	-20 to +40°C
Materials	Polycarbonate
IP Rating	IP65
IK Rating	IK10
Dimmable	On Request
Dimensions	320mm x 78mm
Weight	0.95kg
MacAdam Step	<3
Emergency Output	3 Hours [3W]
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS