

Emergency



IP65 Ingress Protection




Up to 180° Horizontal Tilt




Polycarbonate Housing

Dimensions

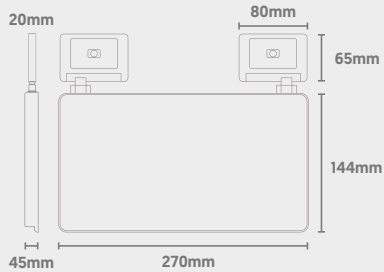

Photometric Data

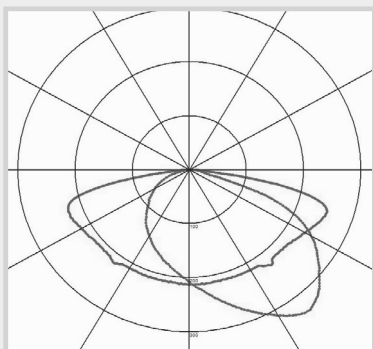

QTwin

Twin Emergency Spotlight

CODE: QTWIN-3H-ST

QVIS[®]

LIGHTING & SECURITY



Power	Output	Testing	Duration
4W (2W per head)	500Lm (250Lm per head)	Self-Test	3 Hours

Technical

Input Voltage	AC 220-240V
Tilt Angle	180° Horizontal; 150° Vertical
Beam Spread	145*83°
Emergency Type	Non-Maintained
IP Rating	IP65
Operating Temp.	0 to +45°C
Mains Current	23mA
Mains Voltage Changeover Threshold	AC 140-180V
Protection	Overcharge & Discharge
Colour Temperature	6000K
Battery Type	3.2V LiFePO4; 6000mAh
Charge Time	24 Hours
Materials	Polycarbonate
Dimensions (Body)	270mm x 144mm x 45mm
Weight	0.53kg
MacAdam Step	<3
CE Standards	EN60598-1, EN 60598 2-22, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS