

Emergency



Toolless Design



Push Fit Connector




Lithium Battery




Hinged Gear Tray

Dimensions

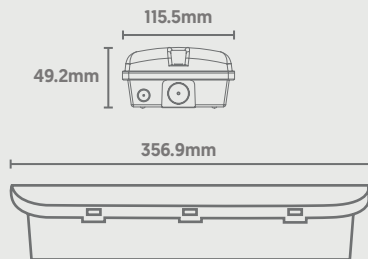

Photometric Data

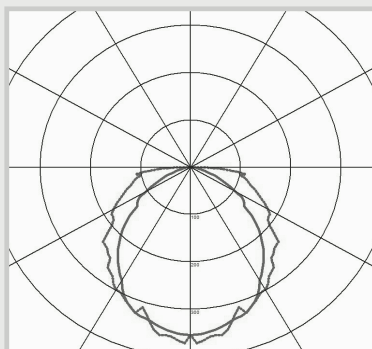

QBrick Gen 2 Emergency Bulkhead

CODE: QBRICK2-3H-ST

QVIS[®]

LIGHTING & SECURITY



Power	Output	Viewing Distance	Testing	Duration
1W	150Lm	20m	Self-Test	3 Hours

Technical

Input Voltage	AC 220-240V
Emergency Type	Maintained / Non-Maintained
IP Rating	IP65 -
Operating Temp.	-20 to +40°C
Mains Current	50mA
Mains Voltage Changeover Threshold	AC 140-180V
Materials	Polycarbonate
Battery Type	3.2V LiFePO4; 1500mAh
Charge Time	24 Hours -
Legend	ISO Man In Door (Right & Left); Arrow Up, Down, Right & Left
Dimensions	356.9mm x 49.2mm x 115.5mm
Weight	0.475kg
MacAdam Step	<3
CE Standards	EN60598-1, EN 60598 2-22, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS