

# Modular



IP44 Ingress Protection



TP(a) Fire Rating



Wattage Switchable




Microprismatic Diffuser

## Dimensions



Light Source Energy Rating

## Photometric Data

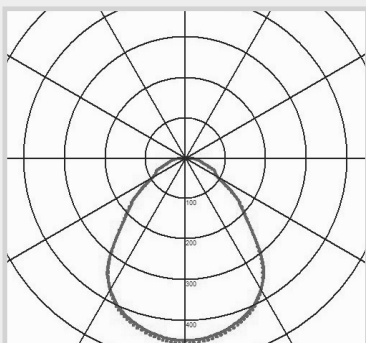

# Lynx SLG Gen 2

## Low Glare Edge-Lit Panel

**QVIS**<sup>®</sup>

LIGHTING & SECURITY

CODE: LYNX-LG2-WS-12X6NW



Panel dimensions suit a range of ceiling types

Power (Selectable)	Efficacy	Output	Kelvin
34W	140Lm/cW	4760Lm	4000K
38W	140Lm/cW	5320Lm	
40W	140Lm/cW	5600Lm	
44W	140Lm/cW	6160Lm	

## Technical

Input Voltage	AC 200-240V
Colour Rendering Index	>85
Beam Spread	160°
Diffuser Type	Microprismatic
Power Factor	>0.95
Typical UGR	<17
Operating Temp.	-20 to +50°C
Materials	Aluminium
IP Rating	IP44
Fire Rating	TP(a)
Dimmable	On Request
Dimensions	1197mm x 597mm x 12mm
Weight	8.5kg
MacAdam Step	<3
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS