



# Downlight



IP65 Ingress Protection



TP(a) Fire Rating




Back-Lit Luminaire




Aluminium Housing

## Dimensions

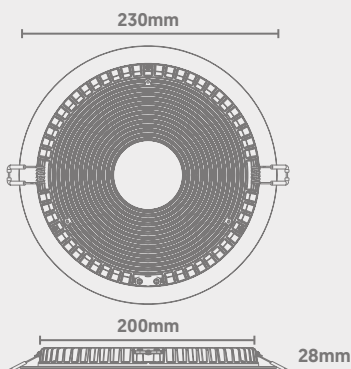

Light Source Energy Rating

## Photometric Data

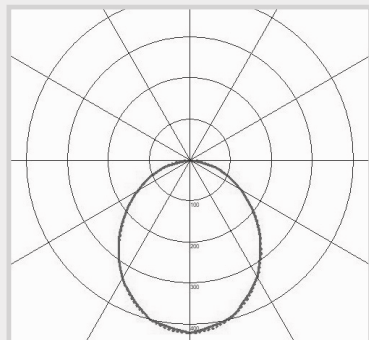

# Helios

## IP65 Recessed Downlight

**QVIS**<sup>®</sup>

LIGHTING & SECURITY

CODE: H65-20-230TC/MPS



Power	Efficacy	Output	Kelvin
20W	105Lm/cW	2100Lm	Tri-Colour: 3000K, 4000K or 6000K

## Technical

Input Voltage	AC 200-240V
Colour Rendering Index	>85
Beam Spread	90°
Diffuser Type	Microprismatic
Power Factor	>0.9
Operating Temp.	-20 to +65°C
Materials	Aluminium & Polycarbonate
IP Rating	IP65
Fire Rating	TP(a)
Dimmable	On Request
Cut Out	200mm
Dimensions	230mm x 28mm
Weight	0.9kg
MacAdam Step	<3
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS