

Downlight



IP54 Ingress Protection



LED COB




Aluminium Housing




Various Drop Glass & Reflector Options Available

Dimensions

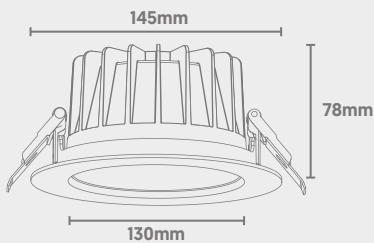

Light Source Energy Rating

Photometric Data

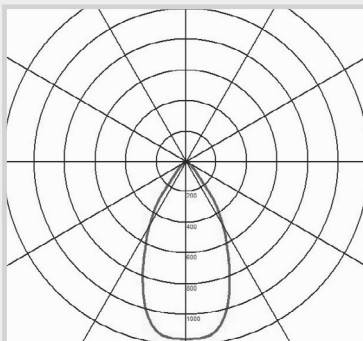

Clarus EVO

Customisable Downlight

QVIS®

LIGHTING & SECURITY

CODE: CLE-10-145-FR-NW



Power	Efficacy	Output	Kelvin
10W	110Lm/cW	1100Lm	4000K

Technical

Input Voltage	AC 200-240V
Reflector Type	Faceted
Colour Rendering Index	>80
Beam Spread	60°
Power Factor	>0.9
Lamp Type	COB
Operating Temp.	-20 to +45°C
Materials	Aluminium & Polycarbonate
IP Rating	IP54
IK Rating	IK06
Dimmable	On Request
Cut Out	130mm
Dimensions	145mm x 78mm
Weight	0.475kg
MacAdam Step	<3
Lifetime	50,000 hours, L90-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS