

# Downlight



IP65 Ingress Protection



30/60/90 Minute Fire Rated  
(BS476-21 Standard)




Wattage Switchable




Quad-Colour  
(2700K/3000K/4000K/6000K)

## Dimensions

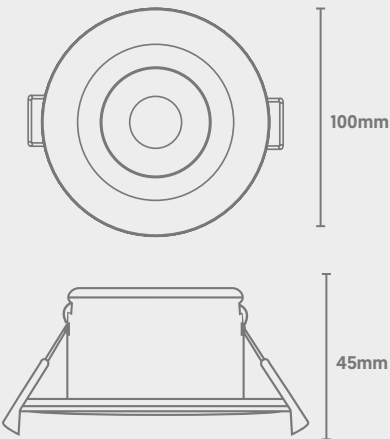

## Photometric Data

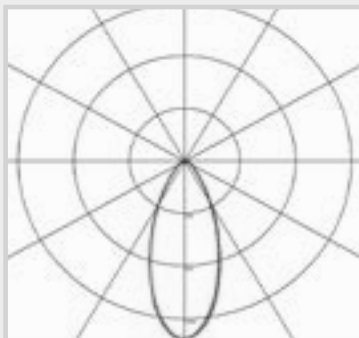

# FRD Elite Tilt

## Fixed Fire Rated Downlight

# QVIS<sup>®</sup>

LIGHTING & SECURITY

CODE: FRD-ELITE-TILT-WS-QC



Power (Selectable)	Efficacy	Output	Kelvin
4W	100Lm/cW	400Lm	2700K or 6000K
6W	100Lm/cW	600Lm	
4W	110Lm/cW	440Lm	3000K or 4000K
6W	110Lm/cW	660Lm	

## Technical

Input Voltage	AC 230V
Colour Rendering Index	>80
Beam Spread	40° - 60° Selectable
Power Factor	>0.8
Lamp Type	SMD
IP Rating	IP65 front, IP20 rear
Fire Rating	BS476-21; 30/60/90 min
Dimmable	[20 fittings max]
Cut Out	68-70mm
Dimensions	Ø 100mm x 45mm
Weight	0.33kg
MacAdam Step	<6
Lifetime	50,000 hours, L70-B10
CE Directives	LVD, EMC, ERP & RoHS
CE Standards	CE Directives LVD, EMC, & RoHS