

# Downlight



IP44 Ingress Protection



Adjustable Cut-Outs




Wattage Switchable




Tri-Colour (3000K/4000K/6000K)

## Dimensions

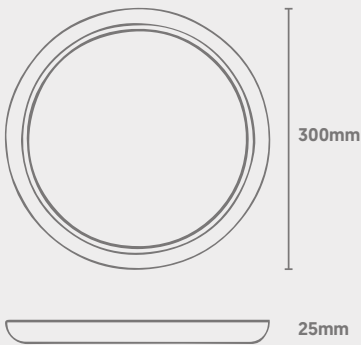

## Photometric Data

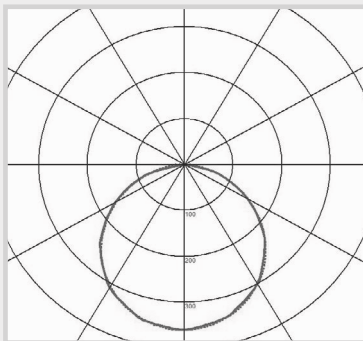

# Virgo Pro

## Multi-Fit Downlight

**QVIS**<sup>®</sup>

LIGHTING & SECURITY

CODE: VGO-PRO-WS-120/200TC



Power [Selectable]	Efficacy	Output	Kelvin
10W	110Lm/cW	11000Lm	<b>Tri-Colour:</b> 3000K, 4000K or 5000K
14W	110Lm/cW	1540Lm	
18W	110Lm/cW	1980W	

## Technical

Input Voltage	AC 200-240V
Beam Spread	110°
Power Factor	>0.85
Operating Temp.	-20 to +40°C
Materials	Polycarbonate
IP Rating	IP44
Fire Rating	TP[a]
Dimmable	On request
Adjustable Cut Out	120 to 200mm
Dimensions	220mm x 21.5mm
Weight	0.53Kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-5, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS